

Awards



Economy class confectionery printer **JetLT-A4**



JETLT
Confectionery printer

www.jetlt.com

You have just acquired an excellent equipment, created for convenient and easy use and profitable income. JetLT economy class innovative printer is made to print on confectionery products but can successfully print on gift-boxes and bags made from paper of different thickness, texture and colour. The more you print the more possibilities you will discover and use and that is what we wish for you.

If you want the printer to work for a long time and do a high quality job, we recommend:

Make a cup of your favourite tea or coffee and while drinking it slowly, read this brochure from beginning to end. Then with a positive attitude, perform all the recommended stages in a row. Calmly, consistently and attentively. While installing the printer you will feel how easy it is to handle it and will get into the mood of creative and profitable work.

Do the first printings slowly so that you could understand the principles the printer functions and the way it is controlled. After printing several ginger bread cookies or cakes, you will see unlimited possibilities of the printer.

In case something happens with the printer, first of all read this brochure and most likely you will find the answer here but if you don't find the answer to your question, you can always contact us by e-mail, Messenger, Viber, whatsApp.

Welcome to the world of creative, profitable and full of possibilities innovative decoration of confectionery products!

Regina Žemaitienė and JetLT printer team.


When removing the printer from the box, carrying it or moving to another place,
lift it only holding at the centre of it as is shown on the picture.



JETLT
Confectionery printer



Ink refilling

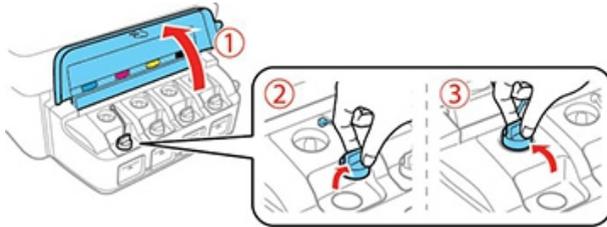

It is filled from the bottle into the container



JETLT
Confectionery printer


Installation on computer

Insert CD (or USB).

Open „Install_L120“ and run „InstallNavi“ file. Follow installation instructions.

Pavadinimas	Tipas	Dydis
_cdres	Failų aplankas	
_model	Failų aplankas	
Apps	Failų aplankas	
Driver	Failų aplankas	
Manual	Failų aplankas	
AUTORUN	Informacija apie sąr...	1 KB
InstallNavi	Programa	2 265 KB

On your computer open:
Settings > Devices > Printers & Scanners


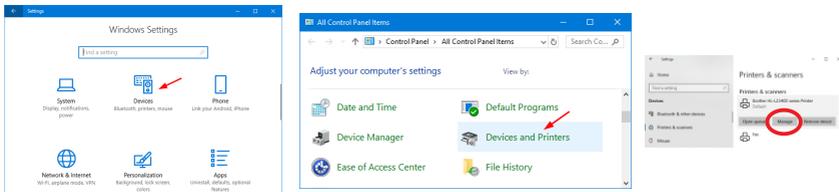


JETLT
Confectionery printer





MAIN SETTINGS

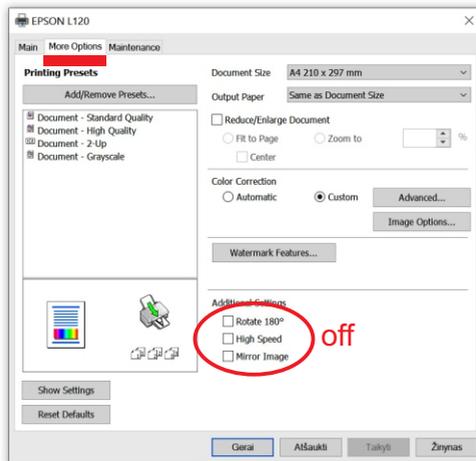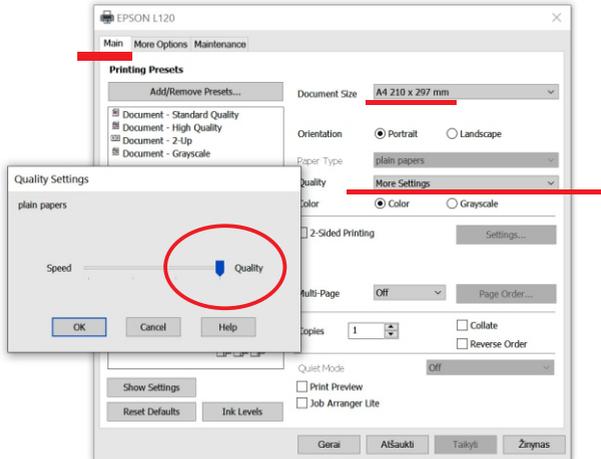


Printing:

switch on the printer and wait until the green light is on without blinking (waiting time up to 1min)
check the basic settings from the application and start printing
wait until the red light on the printer lights up
then push the tray (adjust the height of the printing tray as necessary) and press the red light button
printing will start.




When turning the printer on and off, the tray must be at its initial position

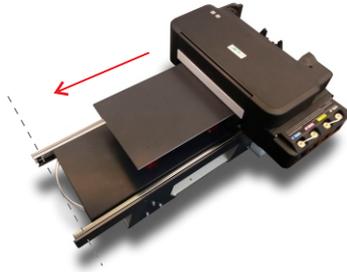

Move the tray forward/backward ONLY when the handle is pressed down!





There should be a distance of 0,5 - 2 mm up to the printing surface.

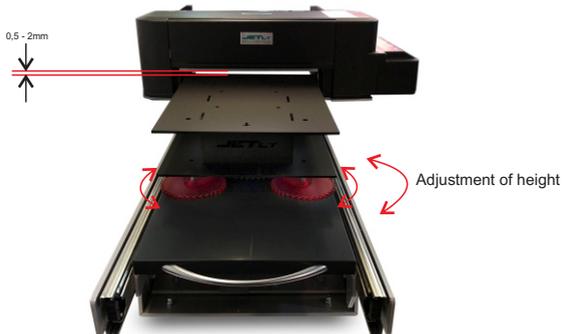





Adjustment of colours

Choose according to your needs or leave Automatic

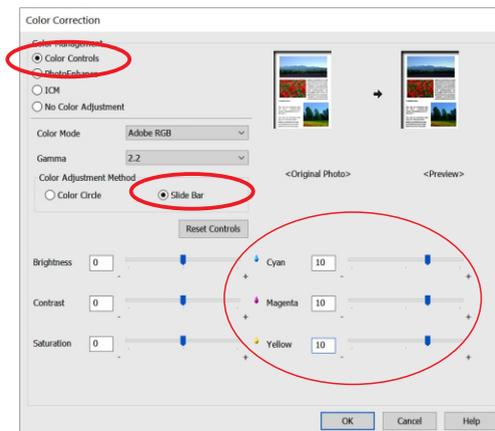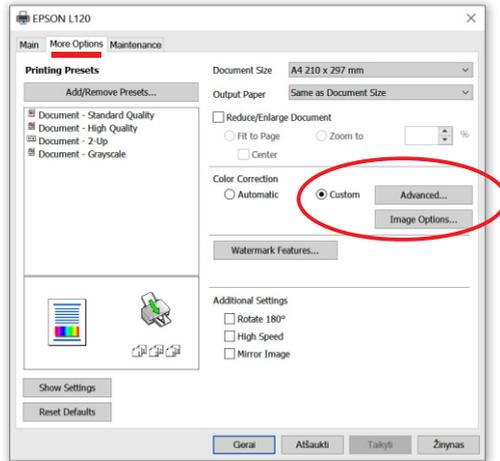



Adjustment of timer

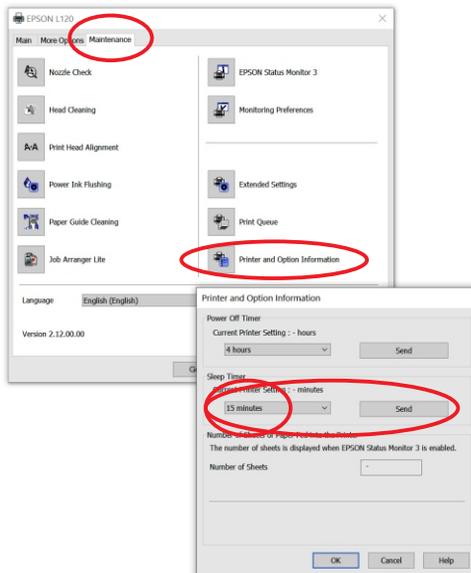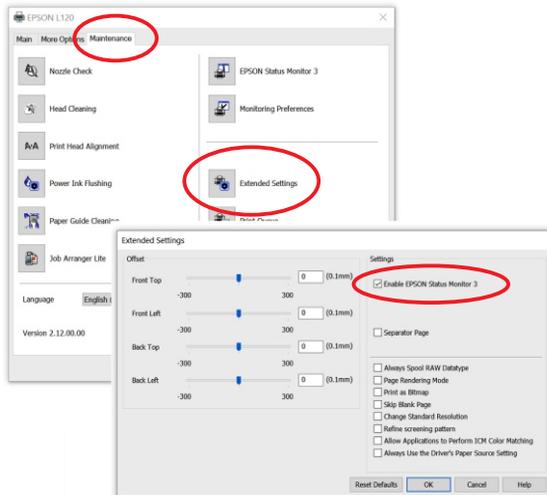



JETLT
DIGITAL FLATBED PRINTER



Printing on glaze

Printing without glaze



JETLT
DIGITAL FLATBED PRINTER





Printing on the dough, then baking



Printing on the dough, then baking the croissants

Cleaning the printing head


Spray nozzle check test

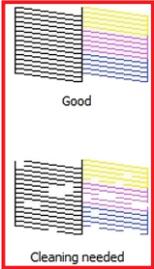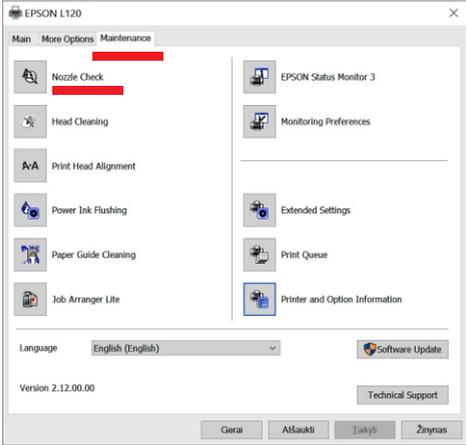

Unsuitable print quality



Cleaning can be performed several times

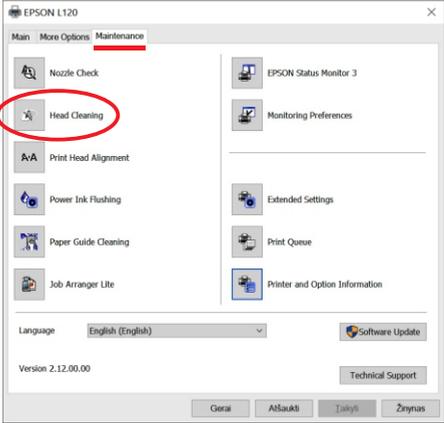

Warranty

Warranty period is 12 months. Post-warranty services. Consultations by telephone, Messenger and other remote methods.

We communicate in: PL/EN/RU languages.

The warranty does not cover the following cases:

Printer head, ink pump or other parts which wear out naturally.

Breakages or other mechanical impact or intervention with any kind of liquids.

When using inks other than recommended by the producer.

The printer for a warranty or post-warranty service is delivered to the producer at the expenses of the Client.

In case of failure or any other questions, please contact:

Ph. +37068689262, +37061480345

info@jetlt.com, regina@jetlt.com, Messenger, WhatsApp, Viber

Maintenance of the printer head

If you are not using the printer, the printer head gets dry. Therefore every 6 -7 days it is necessary to clean the printer head.

Cleaning the printer head

You can clean the printer head without switching on the computer by pressing just one button. Switch on the printer and wait until the green light turns on and stops blinking. Then press the button besides and hold it for several seconds until you hear the printer operation sound. Then release the button. The cleaning process takes place automatically. When the process is over, the printer will switch off automatically and enter the sleep mode.

Requirements for working premises and environment

Requirements for the printer working environment and its keeping conditions.

Premises have to be dry, without any kind of dust, including aerosol gold/silver or any other colour sprays. Temperature in the premises must be no less than 15 degrees.

Operational recommendations

When printing it is recommended to keep the cover of the printer lifted and open so that during the printing process dust of the inks could get out and would not accumulate on the operational parts and components of the printer.

When printing is finished, clean the surface of the printer and the tray from crumbs and other particles.

Cover the printer with the protective cover/case that is provided.

In emergency situation please call: +37068689262, Regina

Contact details: regina@jetlt.com, info@jetlt.com, Vilnius district, Lithuania

Website: www.jetlt.com,

fb: <https://www.facebook.com/jetltpl/>, <https://www.facebook.com/jetltpl/>

We hope JetLT printer will add to your successful and profitable business and will be a convenient and easy to use tool.

Project manager Regina Žemaitienė and JetLT team

Confectionery printer JetLT-A3



JETLT
Confectionery printer

